

CUSTOMIZED MAINTENANCE EQUIPMENT FOR RAILROAD EXCELLENCE

FD-Versex32



PERFECT FOR SMALL CRAWLER
EQUIPMENT RAIL WORK

- UP TO 32,000 LB OF PAYLOAD
- HYDRAULIC DRIVE OR INDEPENDENT ENGINE
- 20 MPH BI-DIRECTIONAL SPEED

Chassis & deck

Rear-end loading	STD
Access ramps with anti-skid coating	STD
Hoist rings and D-rings; Sling & shackle to lift platform	STD
Rail tongs for equipment loading and anti-runaway	STD
Steel deck floor	STD

Powertrain

Propelled with hydraulic connections	STD
Cummins electronic turbo-charge diesel engine	OPT

Capacity

On-rail loading	32,000 lbs (14,515 kg)
On-rail towing	50,000 lbs (22,680 kg)

Powertrain

Axles	1 pivoting axle and 1 fixed axle
Two-wheel drive	STD
Four-wheel drive	OPT
Speeds (forward & reverse)	20 Mph (32 km/h)

Brake System

Air brake system for truck provision	STD
--------------------------------------	-----

Wheels

Standard gauge 56" 1/2 (1435 mm)	STD
Diameter	24" (610 mm)

Stabilizers

2 hydraulic ski-down systems	STD
Green light indicator for stab-down position	STD

Electrical

Power	Battery and solar panels for lights
-------	-------------------------------------

Controls

Platform movements	pedals
Wireless controls	Available only with engine version

Lighting & safety

4 automatic bi-directional LED driving lights (4800 Lumens)	STD
4 automatic bi-directional LED brake lights (4800 Lumens)	STD
8 flashing security lights	STD
Movement alarm	STD

Available options

Lifelines for bridge work	OPT
Versex versatile rail cart and pull bar	OPT
Camera systems	OPT

THE BEST CHOICE FOR EXCAVATORS WORKING
ON AND AROUND TRACK.
THE FD-VERSEX50 HAS A SMALLER PLATFORM
THAT GIVES SMALL EXCAVATORS ACCESS TO
RESTRICTED TRACK AREAS.



Quick, easy access via **rear load ramps**.

Hydraulic-drive **rail gear** axles allow
same speed in both directions.



"Ski" hydraulic **stabilizing** system, 36"
for three ties supporting contact.
Full working chart capacity.



In-deck hoist ring **lifting points** to move
platform on and off tracks quickly.

With pulling power of 50,000 lb, **coupling** with
working carts is available



The Versex50 chassis is also used as a **versatile
cart** with various applications. It has a ramp for
transport, removable lateral poles and side
panels, and a reinforced floor for gondola work.



Wireless **controller** available with engine-
repelled version. No modifications needed
on excavators.




Additional options

- Lielines for bridge work
- Power tools, air tools, etc

Dimensions & weight

Length	27' (8,230 mm)
Width	120" (3,048 mm)
Deck height	25" (635 mm)
Wheel base	68" (1,727 mm)
Weight	8,200 lb (3,719 kg)

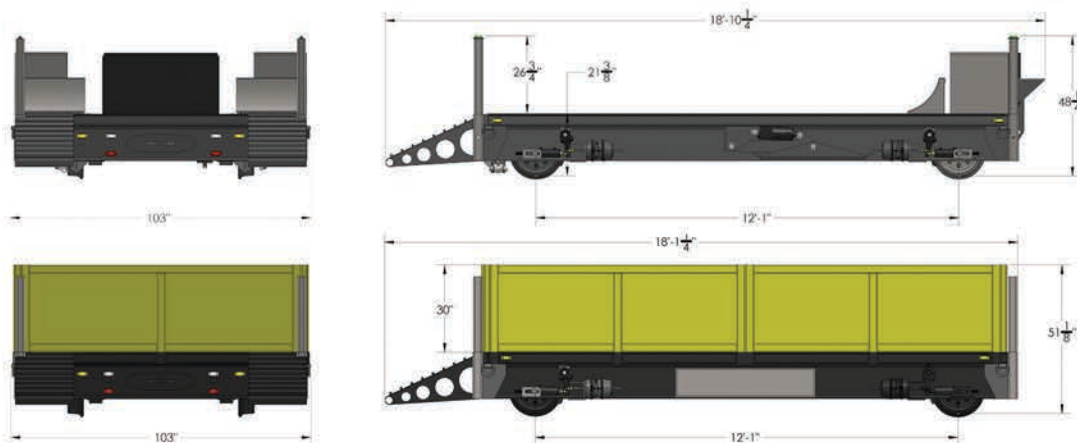

TURNKEY SOLUTIONS
CONSULTANT EXPERTISE
VALUED SATISFACTION

Consultants F. Drapeau - Rail Division
2005 Industrie Blvd, Beloeil, Qc J3G 0S4
T: 450-467-2642
e: rail@fdrapeau.com
www.drapeaurail.com