



# Altec TA50/55/60 Aerial Device

- Working Height up to 64.8 ft and Side Reach up to 40.1 ft
- Optional Altec ARM System Maximizes Productivity
- 600 lbs Platform Capacity Regardless of Jib Capacity
- No Major Preventative Maintenance
- 4-Function Single Handle Upper Control
- Altec ISO-Grip® Control System







# Altec TA50/55/60 Specifications

## STANDARD FEATURES

- Fiberglass Upper Boom & Lower Boom Insulator
- Insulated Aerial Device
- Continuous Rotation
- Articulating Arm Provides Upper Boom Compensation
- Hydraulic Platform Rotation and Tilt
- Full Pressure, Open Center Hydraulic System
- A-Frame Primary Outriggers
- Altec ISO-Grip® Control System
- 4-Function Single Handle Upper Control
- Outrigger Motion Alarm and Outrigger Interlocks
- Back-Up Alarm
- Powder Coat Painted Prior to Assembly
- Two Sets of Hydraulic Tool Circuits at Platform
- Diagnostic Pressure Test Quick Disconnect Couplings
- Emergency Stop Valves at All Upper and Lower Control Stations
- Lower Boom Lifting Eye

## OPTIONS

- Rear or Behind Cab Mount
- Altec ARM System
- Hydraulic Extend Jib
- 2-Man Platform with 180° Rotation
- Engine Start/Stop
- Remote Secondary Stowage
- Jib Adapter
- Phase Lifting Jib Attachment
- Auxiliary Outriggers
- Manual Throttle
- Platform Covers
- Intensifier at Boom Tip
- Tool Circuit Below Rotation
- Platform Elevator


## RECOMMENDED FEATURES

- Fall Protection System
- Platform Liner
- Wheel Chocks
- Outrigger Pads

## GENERAL SPECIFICATIONS

	TA50		TA55		TA60	
Ground to Bottom of Platform*	49.5 ft	15.1 m	54.4 ft	16.6 m	59.8 ft	18.2 m
Working Height*	54.5 ft	16.6 m	59.4 ft	18.1 m	64.8 ft	19.8 m
Maximum Side Reach (@ Platform Height)	36.2 ft 19.9 ft	11.0 m 6.1 m	38.3 ft 22.7 ft	11.7 m 6.9 m	40.1 ft 26.6 ft	12.2 m 8.1 m
Stowed Travel Height, approx.*	11.9 ft	3.6 m	11.4 ft		3.5 m	
Platform Capacity, Single 2-man	600 lbs.			272.2 kg		
Upper Boom Articulation	-25° to 75°					
Articulating Arm Articulation	5.25° to 92.5°		0° to 92.5°			
Rotation	Continuous					

## REACH DIAGRAM

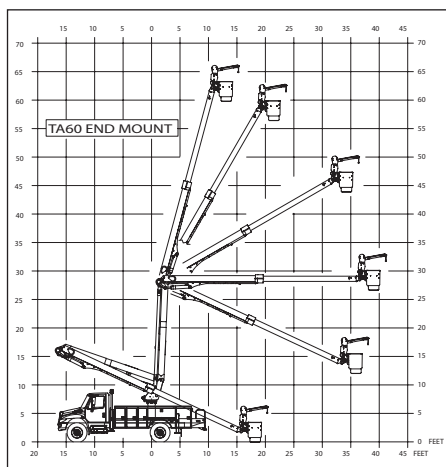

\* Based on chassis frame height of 40 inches (1016 mm).

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.



*The optional Altec ARM System provides the unique ability to handle material on either side of the boom tip.*



*The Altec ARM Jib makes removing and installing transformers Safer and Smarter®.*

sales@altec.com  
Sales – 800-958-2555  
Service – 877-GOALTEC



Manufacturing and Service Facilities Located  
Throughout the United States and Canada  
[www.altec.com](http://www.altec.com)

**Altec Industries, Inc.**  
Post Office Box 10264  
Birmingham, Alabama 35202  
Phone 205/991-7733  
Fax 205/991-9993